



## product introduction

The all metal construction of the Ring Light Series of lights provides a small particle resistant and all around durable light. Its simple plug and play 5 Pin M12 connector allows for ease of use while allowing for full control. The R80 operates with either an NPN or a PNP signal and runs on an industry standard 24 VDC. The 0-10 VDC intensity control assists in gaining full control of the light output. A standard 42 mm inner hole diameter allows for use with nearly all camera systems with available step-up and step-down conversion kits adapters.



## product features



- T-Slot for mounting
- Conversion adapters for different cameras
- PNP and NPN Strobe input
- Continuous operation or Strobe mode
- Dimmable via built in potentiometer
- Analog intensity 0-10VDC signal
- Four, 1mm<sup>2</sup> Die High Current LEDs



## product specifications

<b>Electrical Input</b>	24 VDC +/- 5%
<b>Current</b>	Max. 300mA
<b>Wattage</b>	Max. 7.5W
<b>Strobe Input</b>	PNP ▶ +3VDC or greater to activate.   NPN ▶ GND (<1VDC) to activate
<b>PNP Line</b>	3.7mA @ 3VDC   6.2mA @ 5VDC   12.6mA @ 10VDC   30.4mA @ 24 VDC
<b>NPN Line</b>	22mA @ Common (0VDC)
<b>Yellow Indicator LED</b>	LED Strobe Indicator ON = Light Active
<b>Green Indicator LED</b>	ON = Power
<b>Continuous Mode</b>	Light will be in continuous mode by leaving signal on strobe input active
<b>Potentiometer</b>	Intensity control of 10% to 100% Clockwise increases intensity
<b>Analog Intensity</b>	The output is adjustable from 10 -100% of brightness by a 0 -10 VDC signal
<b>Connection</b>	5 pin M12 connector
<b>Lifespan</b>	100,000 hrs
<b>Ambient Temp.</b>	-20° - 50° C (-4° - 122° F)
<b>IP Rating</b>	IP50
<b>Weight</b>	~183g
<b>Certification</b>	CE and RoHS certified
<b>IEC 62471 Rating</b>	See page 5



## product number key

# R80 – XXX – X\* —» Part Number Key

**Product Family:**  
Ring Light  
R80

**Color:**  
365/395 – UV  
470 – Blue  
505 – Cyan  
530 – Green  
625 – Red  
850/940 – IR  
WHI - White

**Lenses:**  
N - Narrow

\* Lights come standard with Wide lenses

CE and RoHS Compliant



## warnings



### Attention

Please note that the power requirements are up to 300mA at 24VDC. Failure to supply light with up to 300mA can result in non-repeatable lighting. Contact Smart Vision Lights for more information.



## wiring configuration

If Analog 0-10 VDC is not used to control light intensity;  
+VDC (24VDC) must be connected to Analog Input - Jumper pin 5 to pin 1

	Pin	Function	Signal	Wire Color
	1	Power In	+24VDC	BROWN
	2	NPN	Sinking Signal	WHITE
	3	GND	Ground	BLUE
	4	PNP	Sourcing Signal	BLACK
	5	Intensity Control	0-10VDC	GREY †

† Some cables use green with yellow stripe for 0-10V adjustment



## identification




- 0-10 VDC Intensity Adjust
- Signal Indicator LED (Yellow)
- Power Input Plug
- Power Indicator LED (Green)



## optical performance



### R80-XXX

Working Distance mm (inches)	Pattern (80%-100% measured intensity) mm (Inches)
.25m (10")	90mm(3.5") D
.5m (20")	180mm(7") D
.75m (30")	270mm(10.5") D
1m (40")	360mm(14") D
Typical output performance	
Distance = .5 meter	Illumination (Lux)
	3600
<i>Illumination measurement taken on White Lights – 6500K</i>	

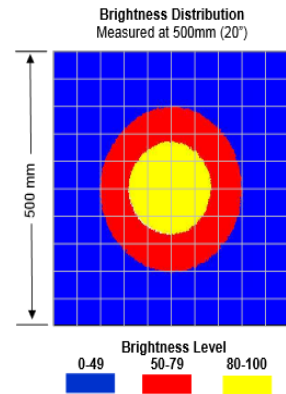

### R80-XXX-N

Working Distance mm (inches)	Pattern (80%-100% measured intensity) mm (Inches)
.25m (10")	80mm (~3.1")
.5m (20")	90mm (~3.54")
.75m (30")	135mm (~5.3")
1m (40")	190mm (~7.5")
Typical output performance	
Distance = .5 meter	Illumination (Lux)
	9200
<i>Illumination measurement taken on White Lights – 6500K</i>	

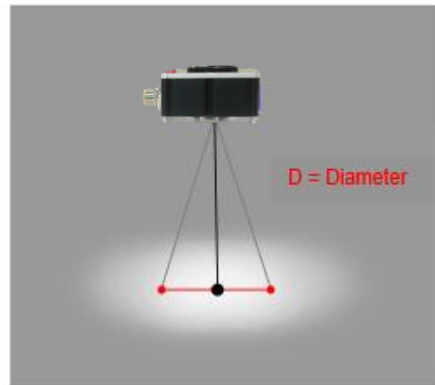

## mounting & accessories

Standard industrial T-slots on each side accept T-nuts



Front mounting of Lens to Ring Light



Rear mounting of Lens to Ring Light





## Standard Adapter Kit – Part # SU46-25.5-27

Adapter Kit includes 2 step up rings (25.5 and 27), 6 set screws and hex tool. 6 set screws – 3 for mounting step up ring to light and 3 additional for lens. Some locking thumbscrews may prevent the lens from fitting through the center of the R80, extra low-profile replacement set screws are included, allowing the protruding thumbscrews to be removed.



## Step Up Adapter Kits

Step Up Adapter Kits includes step up rings, 6 set screws and hex tool. Lenses can be mounted to front or back of ring light. Filters



M46 step-up	Lens thread size	Part #
46-	25.5	SU46-25.5
46-	27	SU46-27
46-	30.5	SU46-30.5
46-	34	SU46-34
46-	37	SU46-37
46-	37.5	SU46-37.5
46-	39	SU46-39
46-	40.5	SU46-40.5
46-	43	SU46-43

## Step Down Adapter Rings

Step Down rings mount large lenses to light. Step Down rings mount lenses to back of ring light. Filters can also be installed.



M46 step-down	Lens thread size	Part #
46-	49	SD46-49
46-	52	SD46-52
46-	55	SD46-55
46-	58	SD46-58
46-	62	SD46-62
46-	67	SD46-67
46-	72	SD46-72



According to IEC 62471:2006. Full documentation upon request.

**Notice**

Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use.  
Applicable for wavelengths: 625, 850, and 940.

**Caution**

Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eye. Safe for most applications except prolonged exposures.  
Applicable for wavelengths: 395, 470, 505, 530, and WHI.

**Notice**

Risk Group 1: UV emitted from this product. Minimize exposure to eyes and skin. Use appropriate shielding. Safe for most applications except prolonged exposures.  
Applicable for wavelengths: 395

**Caution**

Risk Group 2: UV emitted from this product. Eye or skin irritation may result from exposure. Use appropriate shielding. Does not pose optical hazard if aversion responses limit exposure.  
Applicable for wavelengths: 365