


LZEW300 Washdown Linear Light

DAISY-CHAIN

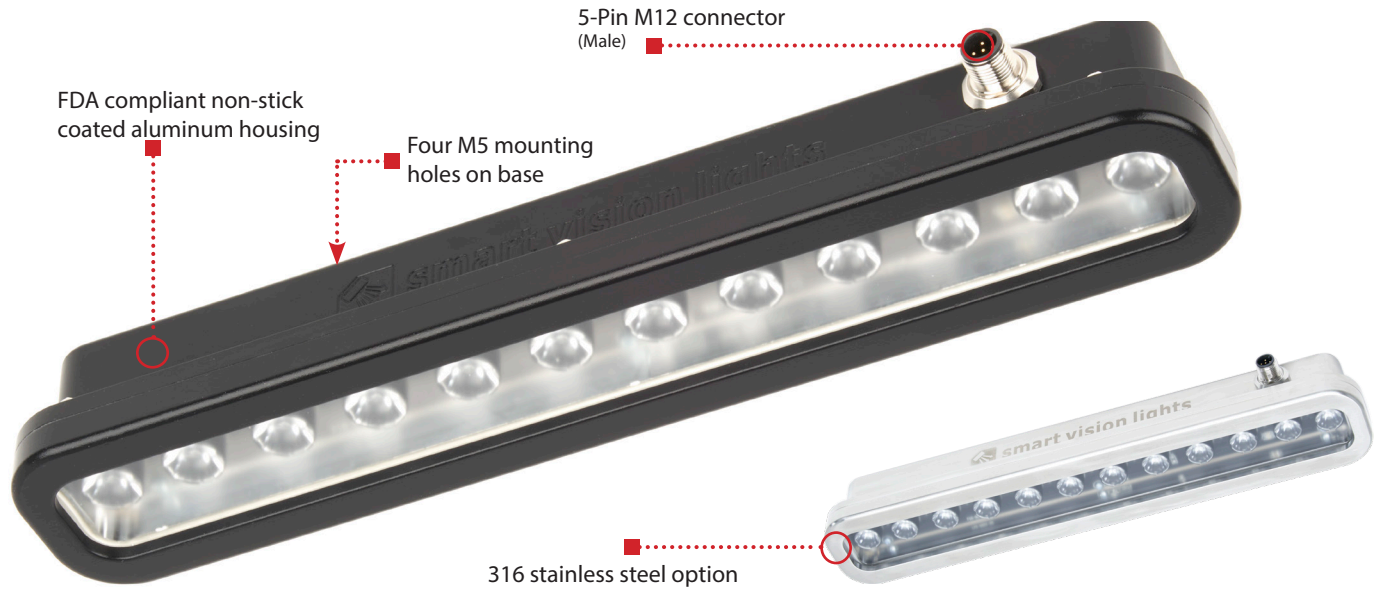

The LZEW300 is a SmartVisionLink™-enabled washdown linear light. It's the first in the industry that can be ordered with an FDA compliant non-stick aluminum housing. A 316 stainless steel option is also available. With the addition of the BTM-1000 Bluetooth module¹, the LZEW300 can be wirelessly adjusted for intensity levels. The LZEW300 can be connected in a series of up to six lights through daisy-chain, to create a total of 18 independently controllable lighting zones².

LZEW300 HIGHLIGHTS

Warranty
**10
YEAR**

Tested
**IEC
62471**

Compliant
**CE
ROHS**

Rated
**IP
69K**

Connector
**5-PIN
M12**

- ✓ Connect up to six LZEW300 linear lights²
- ✓ SmartVisionLink™-enabled provides easy intensity adjustment in both continuous and OverDrive™ modes¹
- ✓ NanoDrive™ provides the ability to turn the light fully on in less than 500 ns
- ✓ FDA compliant non-stick coated aluminum housing or 316 stainless steel housing

¹ BTM-1000 sold separately

² To use daisy-chain you must specify it in ordering. See page 8 for more information.

SPECIFICATIONS

	Continuous Operation	OverDrive™ Operation
Electrical Input	24 VDC +/- 5%	
Input Current	Max. 850 mA	Peak 6 A during strobe
Input Power	Max. 20 W	Peak 144 W during strobe
PNP Trigger	2 mA @ 4VDC 7 mA @ 12VDC 13.4 mA @ 24VDC	
NPN Trigger	12 mA @ Common (0VDC)	
Mode Control	Connect pin 5 to 1 - 10 VDC (10 - 100% output); 24VDC (Max)	Connect pin 5 to GND (See wiring configuration for more information)
Trigger Input	PNP > +4 VDC (24 VDC max.) to activate or NPN ≥ GND <1VDC to activate (not both)	
Strobe Duration	Min. 30 μs Max. ∞	Min. 10 μs Max. 50 ms
Strobe Trigger Delay	10 μs	6 μs
Strobe Frequency	Max 4 kHz or 1 / Duty Cycle as calculated, whichever is less. ¹	
Duty Cycle	Not Applicable	Max 10%
Power Indicator	Turns green when powered up	
Analog Intensity	The output is adjustable from 10% - 100% by a 1 - 10 VDC signal. Jumpering pin 5 to pin 1 will provide maximum intensity. Intensity can be remotely adjusted via SmartVisionLink™ ²	Light is set to maximum intensity by default in OverDrive™ mode and can only be adjusted via SmartVisionLink™ ²
Connection	5-pin M12 connector	
Operating Temperature	-10° to 40° C (14° to 104° F) RH max 80% non-condensing humidity	
Storage Temperature	-20° to 70° C (-4° to 158° F) RH max 80% non-condensing humidity	
IP Rating	IP69K	
Weight	Stainless Steel: 4.25 lbs 1.9 kg Nonstick: 2.00lbs 0.9 kg	
Compliances (pending)	CE, IEC 62471, RoHS	
Warranty	10 years ³	


¹See page 6 for more information

²SmartVisionLink™ requires the purchase of the BTM-1000 bluetooth module, sold separately, and the SmartVisionLink™ app, free to download on the Apple App and Google Play stores.

³See SmartVisionLights.com/warranty for details.

WIRING CONFIGURATION

CONTINUOUS OPERATION MODE



Pin layout for light (Male Connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	Intensity Control	1-10VDC	GREY

For maximum intensity, tie pin 5 to pin 1 at +24 VDC.

For continuous mode: PNP (pin 4) can be tied to +24 VDC (pin 1) **or** NPN (pin 2) can be tied to Ground (pin 3).


For proper light function, apply either a PNP or NPN signal, not both.

Failure to supply light with correct input current will result in inconsistent lighting behavior.

(see Product Specifications for requirements)

WIRING CONFIGURATION (continued)

OVERDRIVE™ OPERATION MODE



Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	OverDrive™ Signal	Ground	GREY

To enable OverDrive™ mode, tie pin 5 to pin 3.

For proper light function, apply either a PNP or NPN signal, not both.

Failure to supply light with correct input current will result in inconsistent lighting behavior.
(see Product Specifications for requirements)

LENS OPTICS


NARROW

The narrow lens option uses a 10° beam angle lens. Narrow lenses create a narrow beam of illumination and are used for long working distances.




LINE

The line lens option uses a 10° x 50° beam angle lens. They project a thin, narrow beam of illumination.



WIDE

The wide lens option uses a 30° beam angle lens. They create a floodlight effect and can be used for short working distances.




LIGHTING PATTERNS


The LZE300 is recommended to be used at a working distance between 200 mm to 1000 mm. Illuminance values taken on white light - 5700K

Standard (10°) lighting patterns

Illuminance vs. Working Distance

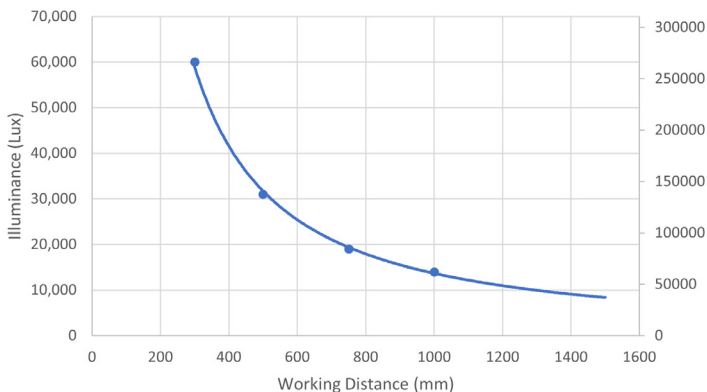


Beam Size at 80% Max Intensity vs. Working Distance

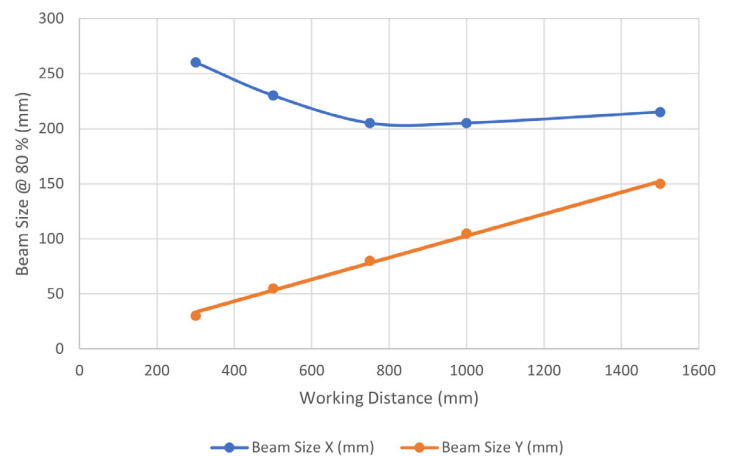


LIGHTING PATTERNS (continued)

Wide (30°) lighting patterns

Illuminance vs. Working Distance

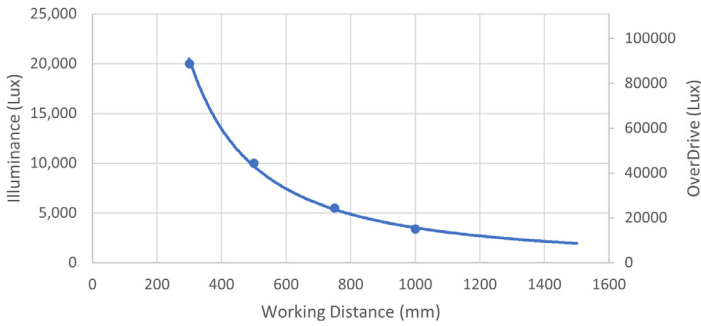


Beam Size at 80% Max Intensity vs. Working Distance

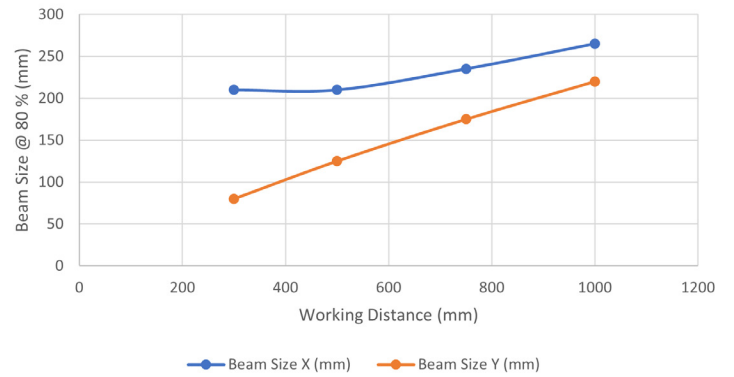


Line (10° x 50°) lighting patterns

Illuminance vs. Working Distance

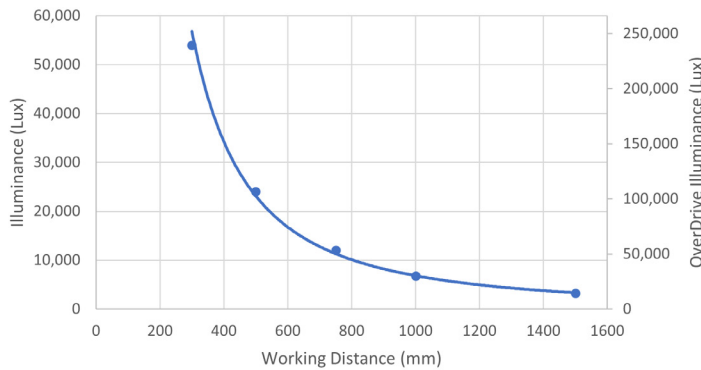

Beam Size at 80% Max Intensity vs. Working Distance

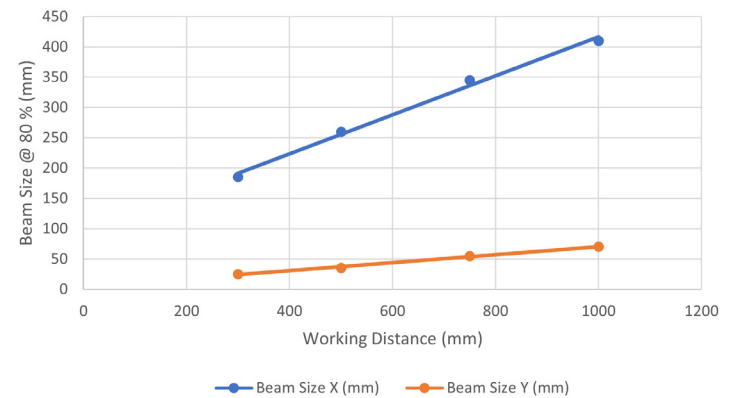


BEAM PATTERNS

The LZE300 is recommended to be used at a working distance between 200 mm to 1000 mm. Illuminance values taken on white light - 5700K

Standard (10°) beam patterns




Grid set to 75 mm

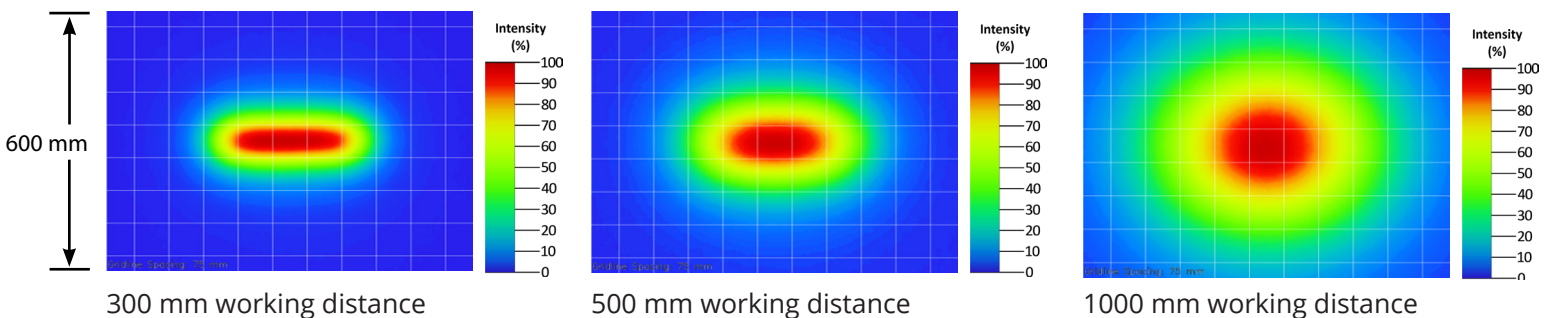

BEAM PATTERNS (continued)




Wide (30°) beam patterns

Grid set to 75 mm

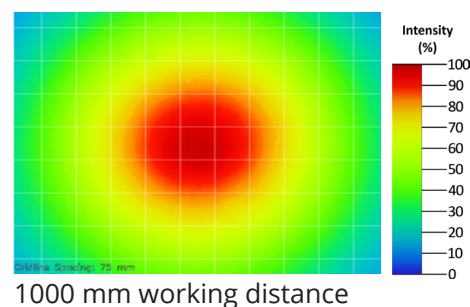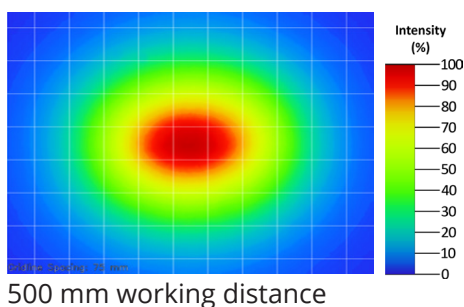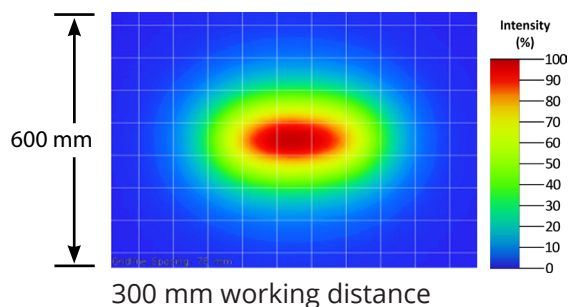

Line (10° x 50°) beam patterns

Grid set to 75 mm

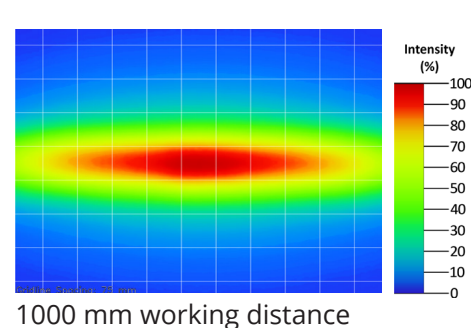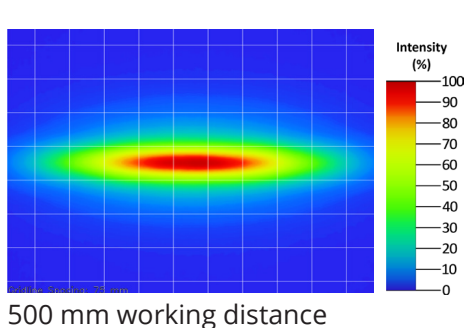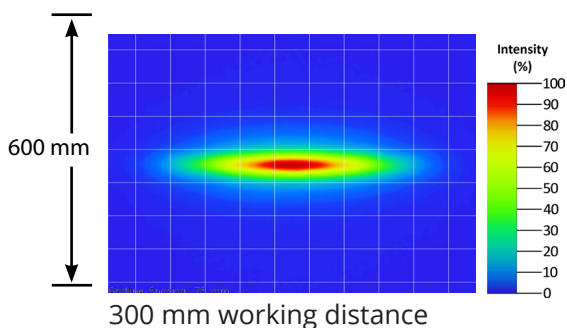

EYE SAFETY

According to IEC 62471:2006. Full documentation available upon request with purchase of product.

Notice


Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use. Applicable for wavelengths 625 and 850.

Caution


Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eyes. Safe for most applications except prolonged exposure. Applicable for wavelengths 470, 530, and WHI.

ILLUMINATION


The LZEW300 works best for:



Dark Field



Bright Field




Direct Lighting

DUTY CYCLE

This section applies only if light is in OverDrive™ strobe mode.

The Duty Cycle (D) is related to the Strobe Time (ST) and Rest Time (RT).

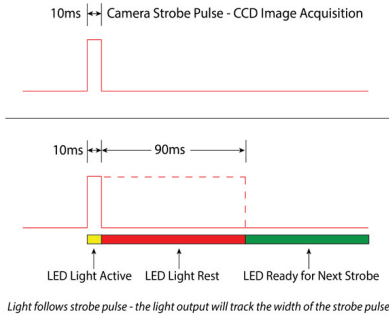

Calculating Rest Time

$$RT = \frac{ST}{D} - ST$$

RT = Rest Time
ST = Strobe Time
D = Duty Cycle

Example

$$90 \text{ ms} = \frac{10 \text{ ms}}{.1} - 10 \text{ ms}$$

Rest Time is 90 ms for 10 ms Strobe Time

Calculating Strobe Rate

$$SR = \frac{D}{ST}$$

SR = Strobe Rate (strokes per second)
ST = Strobe Time (seconds)
D = Duty Cycle

Example

$$1000 = \frac{0.1}{0.0001}$$

Strobe Rate is 1000 strokes per second

Calculating Duty Cycle

$$D = ST \times SR$$

SR = Strobe Rate (strokes per second)
ST = Strobe Time (seconds)
D = Duty Cycle

Example

$$0.1 = 0.0001 \times 1000$$

Duty Cycle is 10% (0.1)

Maximum Duty Cycle for OverDrive™ light is 10% (0.1)

Maximum Strobe Frequency is 1 / calculated duty cycle or 4,000 strokes per second, whichever is less.

NANODRIVE™

To keep up with faster image acquisition by high-speed cameras, lighting applications require light sources to reach full intensity in a shorter amount of time. To meet this demand, the NanoDrive™ has been developed to deliver full power to a light in 500 nanoseconds or less. The NanoDrive™ is designed to allow tens of amps to reach the LEDs within nanoseconds, resulting in a light reaching its full LED power / light intensity within that time frame. All NanoDrive™ lights are able to be set to continuous or OverDrive modes, depending on user configuration. NanoDrive™ technology is patent-pending.



SAFESTROBE™

SafeStrobe™ is a unique technology that applies safe working parameters to ensure high current LEDs are not damaged by driving them beyond their limits, such as maximum strobe time or duty cycle. This is especially beneficial for overdriving our high current LEDs.

NON-STICK HOUSING*

The LZEW300 is the first machine vision washdown light available in an FDA-compliant non-stick coated aluminum housing.

Due to the nature of the coating, it is not recommended to use aggressive mechanical or ultrasonics for cleaning. While chemically inert to most compounds, it is recommended to clean the non-stick housing with a rinse of isopropyl alcohol and de-ionized water. Forced air at low volumes can also be used, as well as soft cloth or cotton wipes. Wire or nylon brushes, scotch-bright pads, or other abrasive tools should not be used.



*To order, fill in -NS in the part number as the housing option. See page 9 for more information.

Ex. LZEW300 - NS - SC - WHI - N10

STAINLESS STEEL HOUSING*

The LZEW300 is also available in an IP69K 316 stainless steel option.



*To order, fill in -SS in the part number as the housing option. See page 9 for more information.
Ex. LZEW300 - SS - SC - WHI - N10

DAISY-CHAIN*

The LZEW300 daisy-chain option provides the ability to use cables to connect together two or more LZEW300 lights. The lights are able to be spaced apart from each other. Up to six LZEW300 lights can be daisy-chained together.



*To order, fill in -DC in the part number as the connector option. See page 9 for more information.
Ex. LZEW300 - NS - DC - 625 - N10


SMARTVISIONLINK™

The LZE300 is SmartVisionLink™-enabled and is designed so intensity can be adjusted using the SmartVisionLink™ app*.

SmartVisionLink™ provides a way for a light to communicate with an app on a mobile device or tablet. This technology allows users to adjust the intensity of the light in both continuous operation and OverDrive™ strobe mode. By connecting the BTM-1000 Bluetooth module to a light that is SmartVisionLink™-enabled, a user can adjust parameters for the light. The SmartVisionLink™ app is available free to download in the Apple App and Google Play Stores.

Visit SmartVisionLights.com/SmartVisionLink for more information.

*Requires the purchase of the BTM-1000 bluetooth module, sold separately.

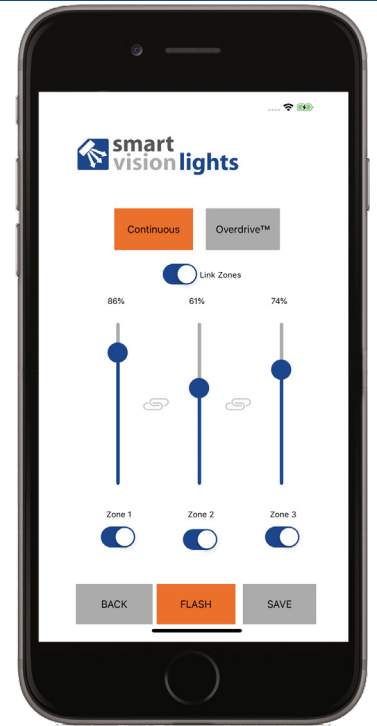






CONNECTING A BTM-1000

The BTM-1000 can be connected directly to a light or attached to a jumper cable that is connected to a light. Once the light's intensity is set to a desired level, the BTM-1000 can be removed from the light or cable.

The pigtail end of the BTM-1000 is connected directly to the light or to the cable attached to the light - sold separately.




PART NUMBER GUIDE

LZE300 —     

HOUSING:
NS = Non-stick
SS = Stainless Steel

CONNECTOR:
SC = Single Connector
DC = Daisy-Chain

COLOR:


LENS:
N10 = Narrow 10°
W30 = Wide 30°
L10 = Line (10° x 50°)

LINEAR POLARIZER*:
Leave blank for none
LPI = Factory Installed

Part Number Examples:

- LZE300-NS-SC-625-N10** LZE300, non-stick housing, single connector, 625 (red) wavelength, narrow 10° lens
- LZE300-SS-DC-WHI-W30** LZE300, stainless steel housing, daisy-chain, white, wide 30° lens
- LZE300-NS-DC-850-W30-LPI** LZE300, non-stick housing, daisy-chain, 850 (infrared) wavelength, wide 30° lens, factory installed linear polarizer

Additional wavelengths and lens options available upon request.

*For lights with lenses, running in continuous operation while using a linear polarizer with certain wavelengths (e.g., white, blue) may burn the polarizer. Incorrect usage of the polarizer is not covered by warranty.

ACCESSORIES

Power Cables (Washdown)



Lengths	Part Number
15 m	W5PM12-15

Washdown cables have a 316 stainless-steel connector(s).

Jumper Cables (Only for Daisy-Chaining, Washdown)



Lengths	Part Number
300 mm	W5PM12-J300

Mount*



Description	Part Number
3-Axis Pan and Tilt Mount	PB300-M5

*Not rated for harsh environments or food

Replacement Mounting Screws



Description	Part Number
Replacement Mounting Screws	SC0058

SmartVisionLink™



Part Number	Description
BTM-1000	Bluetooth Module

Variable Control Pot*





Description	Part Number
Variable Control Pot	IVP-C1

*Continuous mode only





PRODUCT DRAWINGS - STANDARD

CAD files are available on our website. Drawings are in mm.

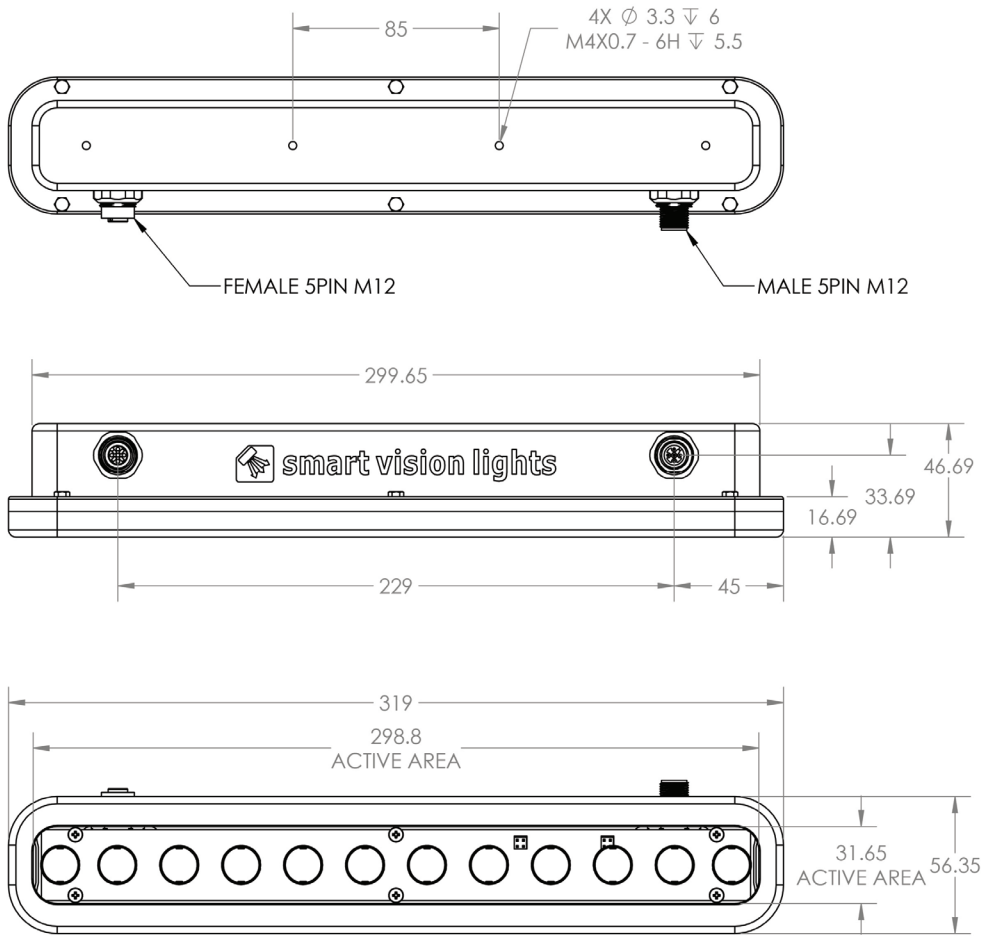

PRODUCT DRAWINGS - DAISY-CHAIN

CAD files are available on our website. Drawings are in mm.

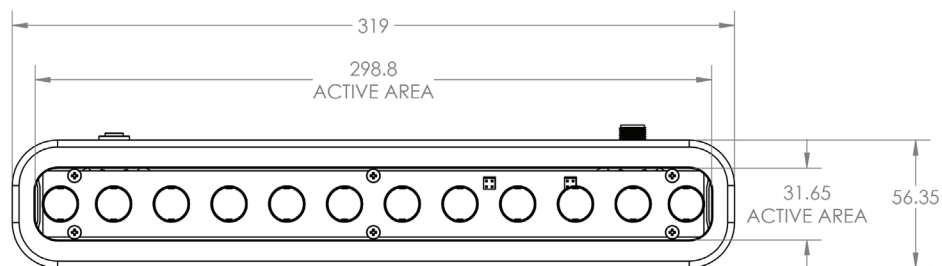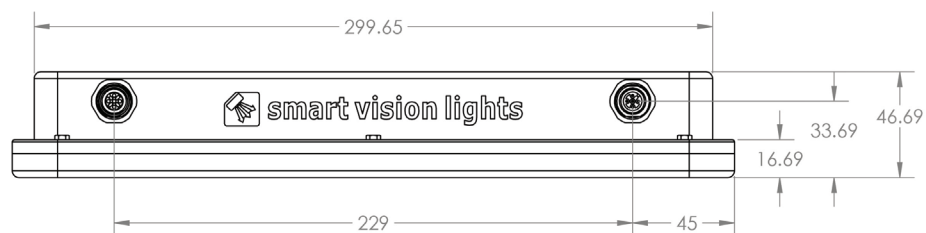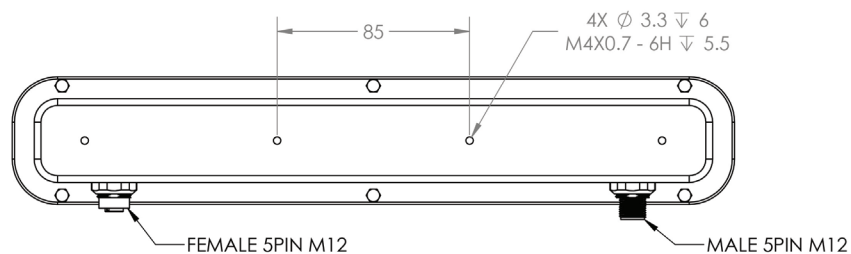

GLOSSARY

This glossary covers all Smart Vision Lights product families; some content in this section may not apply to this specific light.

TERMINOLOGY

Continuous Operation The light stays on continuously.

OverDrive™ Integrated driver that produces a high-current strobe to the LEDs to drive them beyond their nominal continuous operation output.

Multi-Drive™ Integrated driver that combines continuous operation and OverDrive™ strobe mode

NanoDrive™ Integrated driver that provides fast switching where the light can go from off to on in less than 500 ns.

Built-in Driver The driver contained within the light that controls the current to the LEDs and provides PNP, NPN, and analog dimming controls.

SmartVisionLink™ Integrated feature that enables lighting control through the Bluetooth module and app.

Camera to Light Connect the light directly to the camera, without the need for additional controllers or equipment.

Polarizers Filters that reduce reflections on specular surfaces.

Diffusers Widens the angle of emission by scattering light in all directions.


Pattern Area Lighting Modulated lighting pattern placed over a backlight's surface used to enhance defect detection on transparent and glossy surfaces

SafeStrobe Limiter to keep the light in safe working parameters.


Direct Connect Connect lights in a series without the use of cables.

Daisy-Chain Connect lights in a series with the use of cables.


TYPES OF ILLUMINATION



Projector




Dark Field




Radial




Bright Field




Direct




Axial




Line



Diffuse Panel




Backlight



Dome
"Light Tent"

COMMON COLOR / WAVELENGTHS LEGEND

Wavelengths options range from 365 nm to 1650 nm.*
Additional wavelengths available for many light families.



*See Part Number section for **this light's** available standard wavelengths.



Shortwave Infrared LEDs are available in 1050 nm, 1200 nm, 1300 nm, 1450 nm, 1550 nm, and 1650 nm.*

*Check Part Number section to see if **this light** is available in SWIR wavelengths.



ISO 9001:2015 Certified QMS