

4

3

2

1

B

B

A

A


M46 x P0.75
FEMALE THREADS

THREAD RELIEF
(UNDER CUT)

1.375" - 28TPI (~34.9mm)
FEMALE THREAD

Ø 47 Ø 48

4.30
4.60
6.80

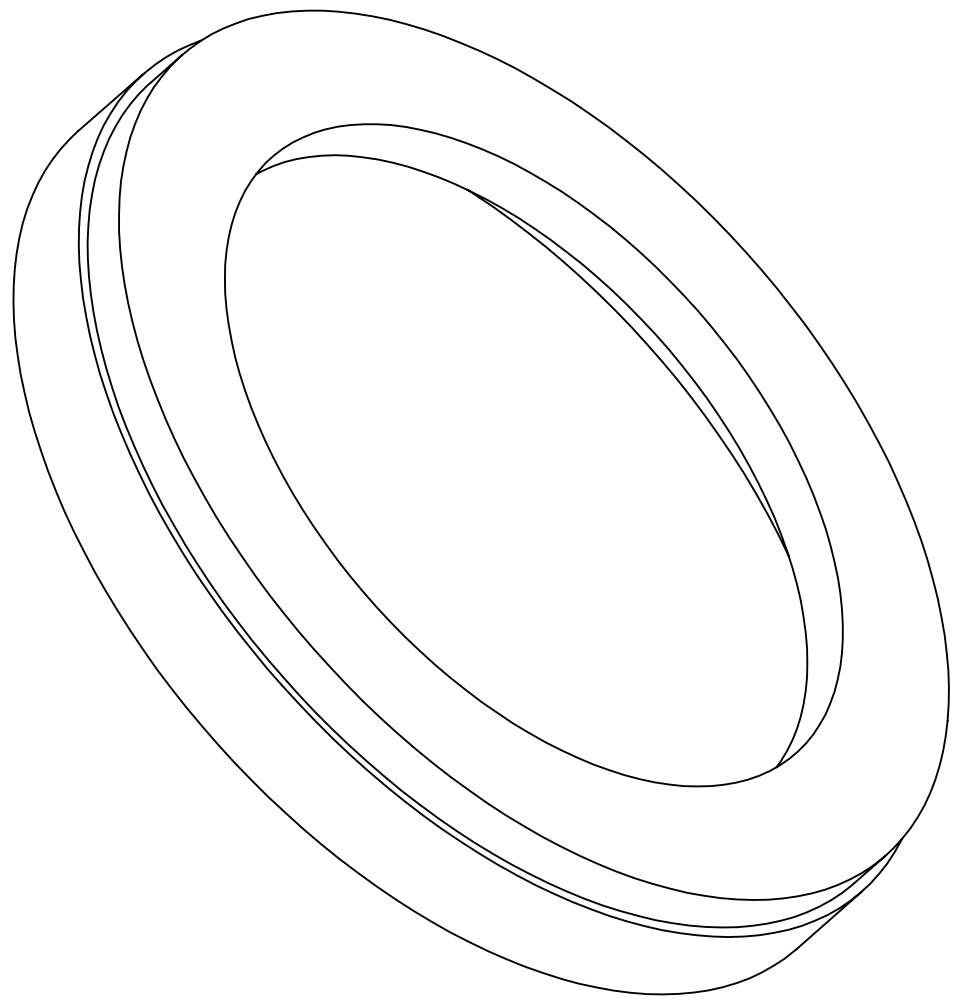

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SmartVisionLights. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SmartVisionLights IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN MM		DRAWN	ASU 6/4/2015
TOLERANCES:		CHECKED	MP 6/4/2015
FRACTIONAL ±		ENG APPR.	MP 6/4/2015
ANGULAR: MACH ±		MFG APPR.	MP 6/4/2015
BEND ±		Q.A.	
TWO PLACE DECIMAL ±.13		COMMENTS:	
THREE PLACE DECIMAL ±		UNITS ARE IN MILLIMETERS	
INTERPRET GEOMETRIC TOLERANCING PER:		DO NOT SCALE DRAWING	
MATERIAL		SIZE	
LY12 ALUMINUM		DWG. NO.	
FINISH		REV	
BLACK ANODIZE		B DF34.9-46 1	
SCALE: 3:1		WEIGHT:	
SHEET 1 OF 1			

 **smart vision lights**

TITLE:
SmartVisionLights.com

SCALE: 3:1 WEIGHT: SHEET 1 OF 1